

SYNTHETIC SLINGS

Plasma® 12 x 12

| | |
|--------------------------|---------------|
| Specific gravity: | 0.98* |
| Melting point: | 284°F (140°C) |
| Critical temp.: | 150°F (65°C) |
| Coefficient of friction: | 0.09-.12* |
| Elongation at break: | 4% – 5% |
| Fiber water absorption: | 0% |
| UV resistance: | moderate |
| Wet abrasion: | superior |
| Dry abrasion: | superior |

* value based on data supplied by the fiber manufacturer for new, dry fiber



AUTHORIZED DISTRIBUTOR



TYPE APPROVED PRODUCT



| PLASMA® 12 X 12 | | | | | | | | |
|--|-----|-------------|--------------------|----------|-----------------------------------|-------------|---|-------------|
| Nominal Diameter | | Size | Approximate Weight | | Min Tensile Strength Spliced Rope | | Min Tensile Strength ISO Unspliced Rope | |
| Inch | MM | (circ. in.) | Lbs/100 ft. | Kg/100 m | Lbs | MT (tonnes) | Lbs | MT (tonnes) |
| ABS and DNV Type Approved Sizes - Up to 4" Diameter (96mm) | | | | | | | | |
| 1 5/8 | 40 | 5 | 66 | 98 | 291,000 | 132 | 323,300 | 147 |
| 1 3/4 | 44 | 5 1/2 | 78 | 117 | 314,000 | 142 | 348,900 | 158 |
| 2 | 48 | 6 | 91 | 136 | 355,000 | 161 | 392,450 | 178 |
| 2 1/8 | 52 | 6 1/2 | 109 | 162 | 428,000 | 194 | 475,600 | 216 |
| 2 1/4 | 56 | 7 | 122 | 182 | 481,000 | 218 | 534,400 | 242 |
| 2 1/2 | 60 | 7 1/2 | 148 | 220 | 530,000 | 240 | 588,900 | 267 |
| 2 5/8 | 64 | 8 | 167 | 249 | 596,000 | 270 | 662,200 | 300 |
| 2 3/4 | 68 | 8 1/2 | 187 | 278 | 660,000 | 299 | 733,300 | 333 |
| 3 | 72 | 9 | 214 | 319 | 780,000 | 354 | 866,700 | 393 |
| 3 1/8 | 76 | 9 1/2 | 235 | 350 | 850,000 | 386 | 944,400 | 428 |
| 3 1/4 | 80 | 10 | 261 | 388 | 940,000 | 426 | 1,045,400 | 474 |
| 3 1/2 | 84 | 10 1/2 | 298 | 443 | 1,108,000 | 503 | 1,231,000 | 559 |
| 3 5/8 | 88 | 11 | 324 | 482 | 1,250,000 | 567 | 1,388,900 | 630 |
| 3 3/4 | 92 | 11 1/2 | 343 | 510 | 1,317,000 | 598 | 1,463,000 | 664 |
| 4 | 96 | 12 | 394 | 586 | 1,520,000 | 690 | 1,689,000 | 766 |
| 4 1/8 | 100 | 12 1/2 | 457 | 679 | 1,622,000 | 736 | 1,802,000 | 818 |
| 4 1/4 | 104 | 13 | 514 | 765 | 1,697,000 | 770 | 1,886,000 | 856 |
| 4 1/2 | 108 | 13 1/2 | 530 | 789 | 1,827,000 | 829 | 2,030,000 | 921 |
| 4 5/8 | 112 | 14 | 546 | 812 | 1,880,000 | 853 | 2,089,000 | 948 |
| 4 3/4 | 116 | 14 1/2 | 587 | 873 | 1,927,000 | 874 | 2,141,000 | 971 |
| 5 | 120 | 15 | 606 | 902 | 2,069,500 | 939 | 2,299,000 | 1043 |
| 5 1/8 | 124 | 15 1/2 | 657 | 978 | 2,212,000 | 1004 | 2,458,000 | 1115 |
| 5 1/4 | 128 | 16 | 703 | 1046 | 2,355,000 | 1069 | 2,617,000 | 1187 |
| 5 1/2 | 132 | 16 1/2 | 749 | 1114 | 2,497,500 | 1133 | 2,775,000 | 1259 |
| 5 5/8 | 136 | 17 | 813 | 1210 | 2,640,000 | 1198 | 2,933,000 | 1331 |
| 5 3/4 | 140 | 17 1/2 | 871 | 1296 | 2,782,500 | 1262 | 3,092,000 | 1403 |
| 6 | 144 | 18 | 932 | 1386 | 2,925,000 | 1327 | 3,250,000 | 1475 |
| 6 1/8 | 148 | 18 1/2 | 985 | 1465 | 3,068,000 | 1392 | 3,409,000 | 1547 |
| 6 1/4 | 152 | 19 | 1038 | 1545 | 3,210,500 | 1457 | 3,567,000 | 1618 |
| 6 1/2 | 156 | 19 1/2 | 1103 | 1642 | 3,353,000 | 1521 | 3,726,000 | 1691 |
| 6 5/8 | 160 | 20 | 1159 | 1725 | 3,496,000 | 1586 | 3,884,000 | 1762 |
| 6 3/4 | 164 | 20 1/2 | 1227 | 1827 | 3,638,500 | 1651 | 4,043,000 | 1834 |
| 7 | 168 | 21 | 1284 | 1911 | 3,781,000 | 1716 | 4,201,000 | 1906 |
| 7 1/8 | 172 | 21 1/2 | 1334 | 1986 | 3,963,500 | 1798 | 4,404,000 | 1998 |
| 7 1/4 | 176 | 22 | 1392 | 2072 | 4,066,000 | 1845 | 4,518,000 | 2050 |
| 7 1/2 | 180 | 22 1/2 | 1452 | 2161 | 4,209,000 | 1910 | 4,677,000 | 2122 |
| 7 5/8 | 184 | 23 | 1527 | 2272 | 4,351,500 | 1974 | 4,835,000 | 2194 |
| 7 3/4 | 188 | 23 1/2 | 1589 | 2365 | 4,494,000 | 2039 | 4,993,000 | 2265 |
| 8 | 192 | 24 | 1653 | 2459 | 4,637,000 | 2104 | 5,152,000 | 2338 |
| 8 1/8 | 196 | 24 1/2 | 1732 | 2578 | 4,779,000 | 2168 | 5,310,000 | 2409 |
| 8 1/4 | 200 | 25 | 1798 | 2677 | 4,922,000 | 2233 | 5,469,000 | 2481 |

Size: Diameter and circumference are nominal. A new unused rope in relaxed state will measure larger; loading and use compacts ropes, sets splices and lessens rope size. This is especially prevalent in sizes above 4" diameter. Published nominal sizes from 4 1/8" and larger represent stabilized or preloaded size.

Weights: Published weights of sizes 1 5/8" – 4" diameter are calculated at linear density under stated preload (200d²) plus 4%. For this chart, sizes 4 1/8" – 8 1/4" diameter represent un-cycled, (non-stabilized weights).

Tensile Strengths: Tensile Strength determined in accordance with Cordage Institute 1500 Test Methods for Fiber Ropes and ISO 2307.

• Plasma is a Trademark of Cortland.



WARNING

Do not exceed rated capacities. Sling capacity decreases as the angle decreases. Do not use at an angle less than 30° from horizontal.



Plasma® 12x12 is a 12-strand braided rope in which each of the 12 strands is, in turn, a 12-strand rope, or braided primary strand. Plasma® 12x12 is manufactured from High Modulus Polyethylene (HMPE) that has been enhanced by Cortland's patented recrystallization process. This process is especially effective in medium to large diameter ropes where strengths are over 50% higher and creep is significantly less than that of standard Spectra® 12 strand.

This patented construction addresses the most critical properties of the fibers to provide a very high strength translation efficiency for larger ropes. This design allows for long lay lengths, making rope that is more flexible for bending applications, easy to inspect, and can be quickly spliced using standard 12 strand splicing techniques. Plasma® 12x12 is supplied with our standard polyurethane finish, although other coatings can be applied to suit specific applications.


Rope Specifications

Minimum Tensile Strengths Minimum Tensile Strengths shown are for new (unused) rope and will decrease after use. All tests are performed in accordance with Cordage Institute Standard CI 1500-2. The rope strength will be reduced after use due to heat, abrasion, ultraviolet or chemical exposure. The tensile strengths may be further reduced by up to 50% as a result of knots or kinks. Minimum Tensile Strengths are defined as two standard deviations (typical about 10%) below the average.

Maximum Working Loads Maximum Working Loads are determined by dividing the tensile strength by the safety factor. The safety factor is a function of the physical properties of the rope, age and history, the type of service it will be subjected to and the risks involved if failure occurs. For a rope manufacturer to give blanket working load recommendations would be like a car manufacturer giving the "safe driving speed" of their cars. Obviously the conditions of use far outweigh the design characteristics of the rope. Typically safety factors vary from 3:1 (for new rope used in applications with uniform loading and where failure would cause little or no risk to equipment or personnel) to 20:1 (for conditions involving moderate shock loading, possibility of snags or kinks or where failure could cause severe risk to equipment or personnel).

Rope Weights Rope Weights shown are average and may vary plus or minus 5%.

Working Elongation Working Elongation is shown from a preload tension of 200 times the diameter squared per the Cordage Institute Standard.

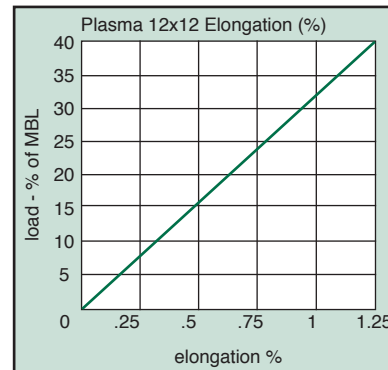

Special Requirements

Factory Splicing Various types are available for all of our ropes. Splices can be provided with various types of chafe protection or coatings.

Custom Lengths Special constructions are available upon customer request.

Rope Terminations Southern Wire can provide custom terminations such as thimbles, links, rings, and custom hardware. Terminations are available in plastic, bronze, stainless steel and galvanized steel. Please call or fax your requirements for a quotation.

Special Coatings Coatings such as polyurethane, polyethylene and vinylesters may be applied to any of the synthetic ropes to improve snag resistance, sunlight resistance or for color coding. Southern Wire can provide ropes with a variety of finishes to meet your needs.

Commercial and Military Specifications Certificates of compliance are supplied at no charge if requested when placing the order. Certified test reports can be provided at an additional charge when requested at the time of order.

Features & Benefits

- World's strongest rope for its weight
- Long lengths available
- High flex fatigue and abrasion resistant
- Easy to splice, inspect, and repair
- Neutrally buoyant in water
- Select sizes are ABS & DNV type approved

Applications

- Replacement for wire rope heavy lift slings
- Tug vessel assist lines
- Vessel mooring lines
- Offshore working ropes
- Lashings

WARNING
 Do not exceed rated capacities. Sling capacity decreases as the angle decreases. Do not use at an angle less than 30° from horizontal.